





INSTRUCTIONS

Seat Strap with Quick Clips

Step 1 Attach seat strap to the passenger seat with the fixed seat clip (non-adjustable end). Attach the other seat clip and cinch tightly. For best positioning the seat strap should be centered (front to rear) on the passenger seat. A firm touch will ensure the hook and loop is mated properly. Go to Step 2.

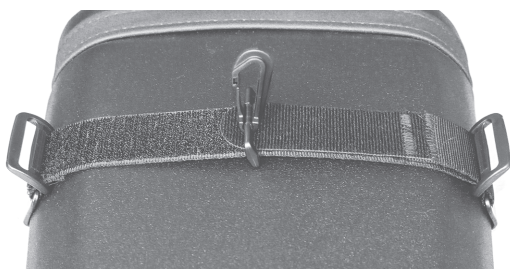

Seat Strap with Quick Clips

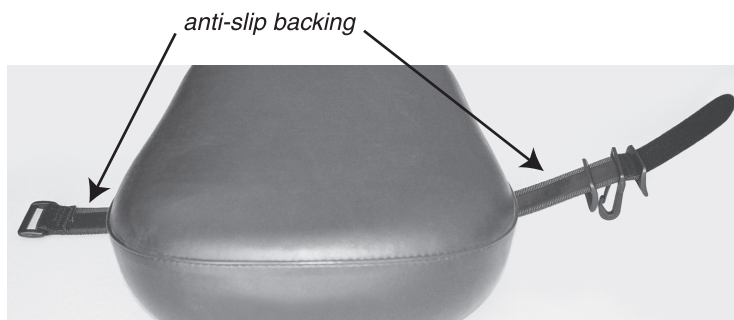

36" Universal Seat Strap

If your seat does not accept the seat clips use the 36" universal seat strap. Slide the Velcro® hook end of the strap under your passenger seat and then transfer the hardware to the universal seat strap as shown (it may be necessary to remove the rear seat bolt and lift the seat for clearance). Once positioned as shown, place the Velcro® hook end through the opposite end with the rectangular hardware and cinch tightly. A firm touch will ensure the hook and loop is mated properly.

Step 2 Position dual slides on the sides of the seat and the safety clip in the center as shown. Place the helmet on the seat facing forward or rearward and attach the safety clip to the helmet D-ring.

Step 3 Center the HelmetBra™ over the helmet and cinch each strap end evenly through the dual slides. A firm touch will ensure the hook and loop is mated properly.

Always follow your motorcycle manufacturers recommendations and wear a helmet.

HelmetBra™ is warranted 30 days from date of purchase for material and or workmanship only. When used properly HelmetBra™ will hold any helmet safely and securely, therefore not responsible for dropped or damaged helmets or any damage that may occur to the motorcycle. The use and attachment of this product is beyond the control of Just a Cinch LLC and any liability for defects is limited to the replacement cost only. Normal wear and tear is not sufficient grounds for replacement. Warranty is void if the HelmetBra™ is cut, damaged or improperly used.

Just a Cinch LLC
P.O. Box 185002
Fort Worth TX 76181